

# MC4 SOLARCOVER

## Ray tech®

THE EXTRA DARK COVER WITH GEL FILLER,  
FOR SEALING MC4 CONNECTORS FROM 4 TO 10 mm<sup>2</sup>  
FOR SOLAR AND PHOTOVOLTAIC SYSTEMS.  
RESISTANT TO UV RAYS, CORROSION AND IMMERSION IN  
WATER, EVEN IF SALTY OR CHLORINATED.



LOADED WITH CARBON BLACK  
UV RESISTANT



INSTALLATION TEMPERATURE:  
-40 °C / +50 °C



WORKING TEMPERATURE: +125 °C



NO FLAME PROPAGATION:  
CEI 20-35 IEC 60332-1 HD405-1  
As applicable



SELF-IGNITION TEMPERATURE:  
> 400 °C



OPERATING VOLTAGE  
1500V DC

GEL



## READY, FAST AND ALWAYS INSPECTABLE

Codice Art.:  
**MC4SOLARCOVER**  
(Confezione da 2 PZ)



**RESISTANT**

**IP68**  
OFFICIALLY  
TESTED | **IMQ**

IT PREVENTS THE DETERIORATION OF MC4  
CONNECTORS, PRESERVING THEIR PERFORMANCE  
OVER TIME, THUS AVOIDING MALFUNCTIONS AND  
DIFFICULT AND EXPENSIVE MAINTENANCE.

# MC4 SOLARCOVER

- Made of UL 94-V2 polypropylene;
- Highly resistant to water, corrosion and frost;
- Complete with sealing silicone gel filler, non-toxic and safe;
- It is the ideal accessory to protect cable connections for solar and photovoltaic systems over the seasons and consequently affected by variations in temperature and weather conditions;
- It allows the reduction of risks from electric arcs and the resulting overheating.

READY, QUICK AND VERY EASY TO INSTALL, IT CAN ALWAYS BE INSPECTED, RESISTANT TO UV RAYS AND FLAME RETARDANT.

IT DOES **NOT INCLUDE** THE MC4 CONNECTOR BUT EVEN IN THIS CASE, ALWAYS CHOOSE THE BEST! 😊

160 x 43 x 30 mm




Art.:  
**MC4SOLARCOVER**  
(Pack of 2 PCS)


**IP68**  
OFFICIALLY  
TESTED | **IMQ**

Casing: Polypropylene UL 94-V2

Filler: Silicone GEL **UL 94-HB**

Halogen-free.   
Non-Toxic and not classified as hazardous

# Ray Tech®

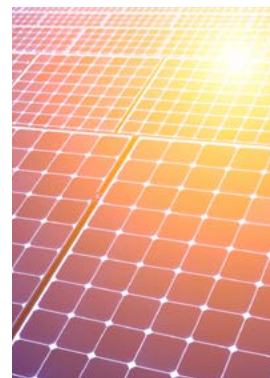

**RESISTANT**